


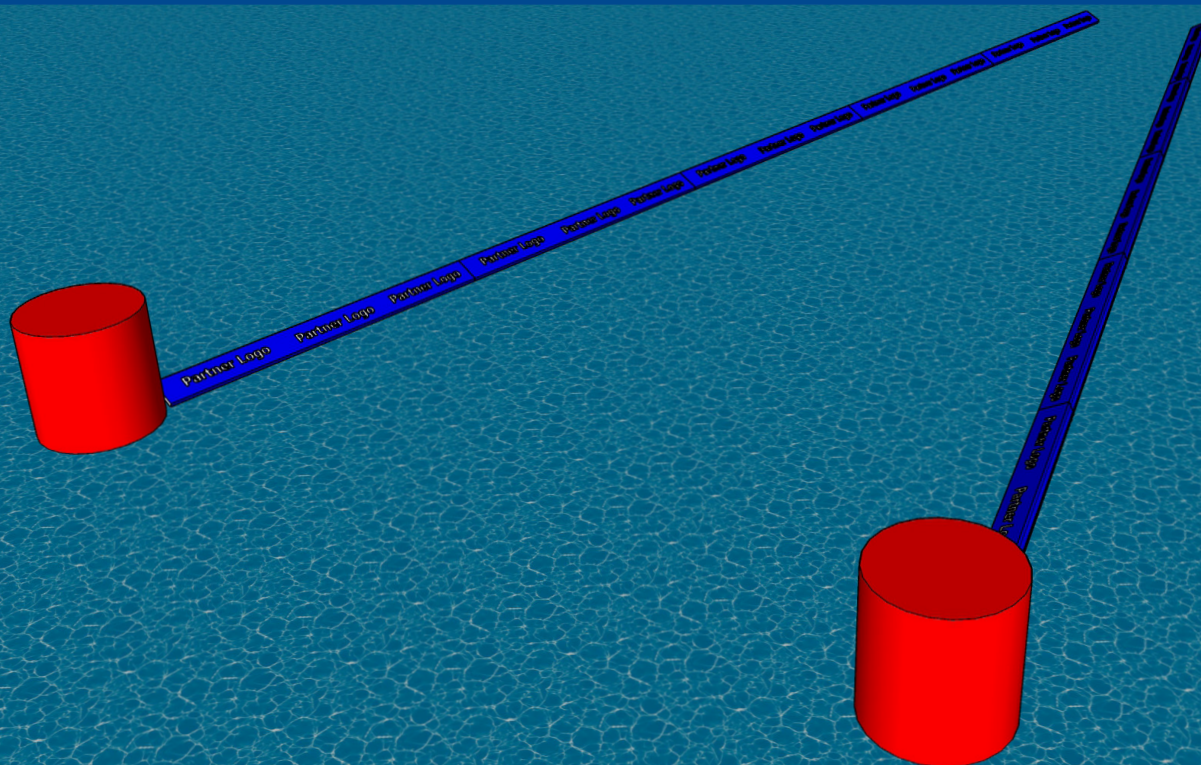

Advertising Structure Slanted

Art. No. 1310022

A building stone to build a nice framework for your next competition in open water or water polo. The Advertising Structure Flat is suitable for use instead of finishing lines for Open Water, Open Water Feeding Station barrier, and for advertising around the Water Polo Field of Play.

Each structure is equipped with 2 stainless steel D-ring anchors on each end, to connect the structures together. Equipped with pre-fixed soft side (loop) velcro strips for placement of advertising banners (banners not included).

Finishing Open Water We recommend that you build 2 parts with at least 5 structures per side, thus covering the 25-meter finishing.

Safe for the swimmer's last 25-meter battle to reach the goal. For visibility for the swimmers, we recommend our Swim Course Marker small to be connected at the start of the finishing gate. Sold separately.

Open Water Feeding Station Keep the ocean clean. Advertising Structure Flat can also be used as a barrier to avoid bottles from the feeding station floating away in the ocean.

Water Polo For men/women field line, we recommend 5 structures on each side of the field of play.

Product Information

Material:

Strong plastic-treated Trevira-material, stainless steel anchor rings

Color: White

Dimensions one unit:

5000 mm x 400 mm x 200 mm (LxWxH)

Please Note:

Equipped with pre-fixed velcro strips for placement of advertising banners (Banners not included).

1515010 Electric Pump recommended
Pump sold separately.

Sold per unit

Advantages:

- Strong plastic-treated Trevira material
- Velcro front for banner placement
- Easy to inflate/deflate
- Building block system, build your own length
- Advertising possibility – flat surface with great visibility for drone filming/video

Selected When it Counts

Advertising Structure Slanted - Instructions/Maintenance

For a long and successful product life, handle with care.

Be careful when opening new box as a cutting knife may damage the inflatable unit.

Also be aware that sharp corners or dragging on pool deck may damage the unit.

After use, rinse off the unit with clear tap water and let air dry before placing back in storage bag.

Please Note: Be careful when opening storage bags and handling the equipment.

A cutting knife, sharp corners or dragging on ground or beach will damage the unit.

To inflate:

1. Unscrew the plug
2. Attach pump and inflate. It takes about 5- 10 minutes.
3. When finished - screw the plug back on

Please Note: Do not over-inflate as it can damage the buoy beyond repair. Keep air outlet clear of dirt and debris as this may cause air to leak out of the the outlet.

- Place advertisement banners once inflated.
- Place buoy in the water.
- When finished using - carefully remove from the water. Please note, any sharp edge may damage the PVC. Rinse with clean water and let air dry.
- Once fully dried - deflate unit.

To deflate:

1. Unscrew the plug.
2. Use the "air-intake" side on the pump to deflate.
3. Clean unit with clear tap water. Remove dirt and let air dry.

Please Note: Check for dirt and debris in and around the air outlet, clean thoroughly before storage.

- To fit back into storage bag, it is crucial to tightly roll and fold the buoy. (Once buoy is completely dry)
- In case of air leakage through a small hole - wipe area dry and affix repair sheet (not included) with suitable glue for PVC (not included).