


## TECHNICAL SHEET



<b>ASSEMBLED CODE</b>	4505PGGB
<b>DESCRIPTION</b>	Polymer concrete sump unit, L. 500 mm, for channel MOD. BASE 100 and BASE 100 LOW, c/w 1 x GJS500-7 ductile iron inlay gratings, 8 mm slots, painted, installed and locked. Load class B125 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>LOADING CLASS</b>	B125 - EN 1433:2008
<b>1) CHANNEL</b>	4505P
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Base series 100
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Without profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>2) GRID</b>	4505GSJ
<b>GRID TYPE</b>	Ductile-iron Grid
<b>MATERIAL</b>	Ductile-Iron GJS500-7 : EN1563
<b>SURFACE FINISH</b>	Paint coating

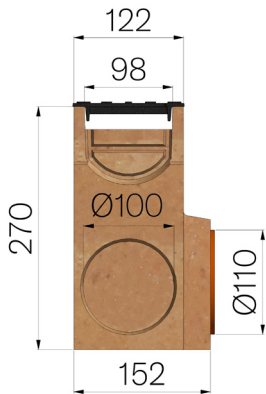

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
500 x 152 x H 270	100	62	36,95