


TECHNICAL SHEET



ASSEMBLED CODE	4505PGSB
DESCRIPTION	Polymer concrete sump unit, L.500 mm, for channel MOD. BASE 100 and BASE 100 LOW, c/w 1 x GJS500-7 ductile iron inlay gratings, 6 mm slot (heelguard), painted, installed and locked. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	C250 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	1
1) CHANNEL	4505P
MATERIAL	Polymer Concrete
SERIES TYPE	Base series 100
SECTION TYPE	Standard
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4505GSA1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

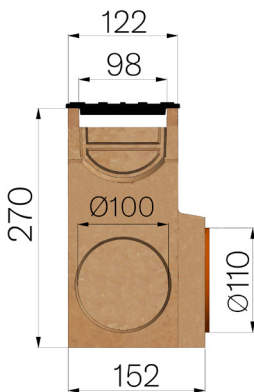

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
500 x 152 x H 270	100	62	38,18