



## TECHNICAL SHEET

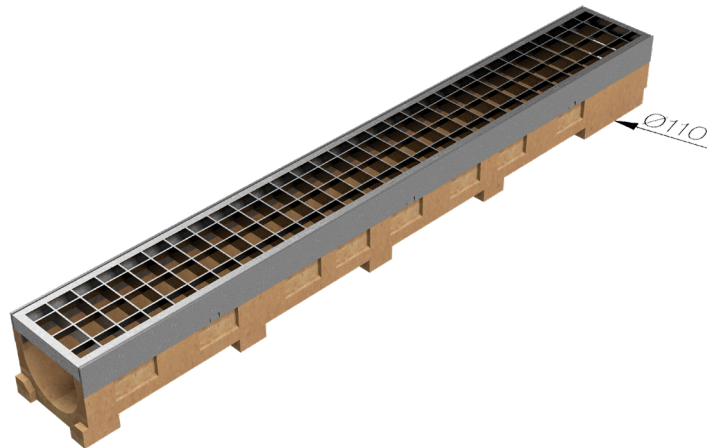

<b>ASSEMBLED CODE</b>	4505SPGP
<b>DESCRIPTION</b>	Polymer concrete channel MOD. BASE 100 EVO, with galvanised protective edge rails, c/w S235JR steel inlay pressure-locked grating, 20x2-10x2, 33x33 mesh, installed and locked, hot dip galvanised. Channel average runoff section sqcm. 62. Load class B125 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	B125 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
<b>QUANTITY PER PACK</b>	1
<b>1) CHANNEL</b>	4505S
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Base series 100
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Without profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>WATER FLOW LT / SEC</b>	0,5%=4,1 - 1%=5,8 - 1,5%=7,1 - 2%=8,3 - 3%=10,1

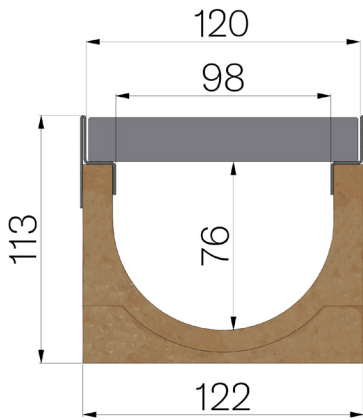

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 122 x H 113	98	62	110	10,98