



TECHNICAL SHEET

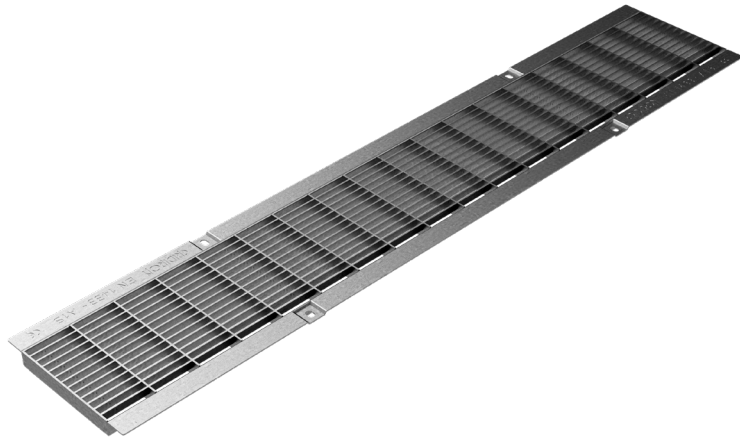

CODE	4510AA
DESCRIPTION	Press-locked grating panel, in S235JR UNI EN 10025-2:2019 steel, bearing bar 20x2, transverse bar 10x2, mesh 55x11 (heelguard), with Z shaped edge, hot-dip galvanized, suitable for VIBRO-BASE 150 drain channel, pedestrians loading class.
PRODUCT LINE	Press-locked
MATERIAL	S235JR steel - EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461
STANDARD	EN 1090-1:2009 + A1:2011
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Galvanized surface as per standard EN ISO 1461. Galvanizing durability according to EN ISO 14713.
REACTION TO FIRE	Class A1 according to standard EN 13501-1
LOADING CLASS	A15 - EN 1433:2008



Article dimensions mm	Weight Kg/each
150 x 1000 x H 20	4,18