



# TECHNICAL SHEET

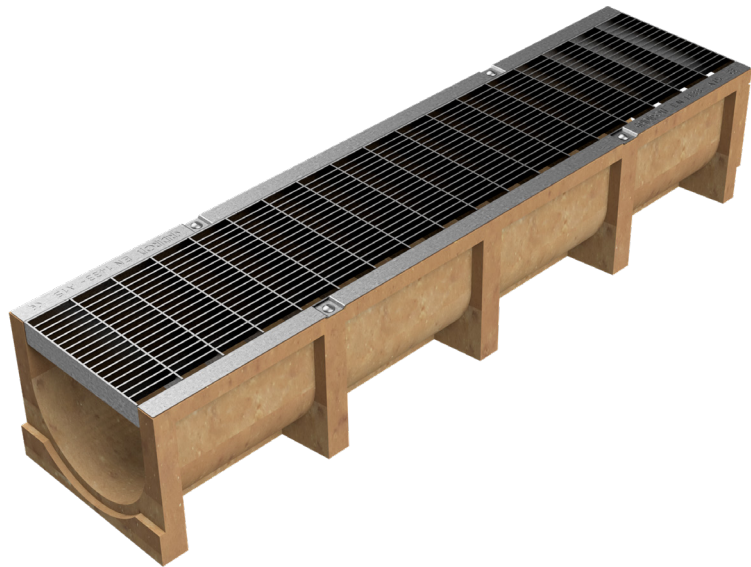

<b>ASSEMBLED CODE</b>	4520SAA
<b>DESCRIPTION</b>	Polymer concrete channel MOD. BASE 200, c/w S235JR steel inlay pressure-locked grating, 30x2-10x2, 55x11 heelguard mesh, installed and locked, hot-dip galvanised. Channel average runoff section sqcm. 315. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>LOADING CLASS</b>	A15 - EN 1433:2008
<b>1) CHANNEL</b>	4520S
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Base series 200
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Without profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>2) GRID</b>	4520AA
<b>GRID TYPE</b>	Press-locked
<b>MATERIAL</b>	Carbon Steel S235JR acc. to EN 10025-2:2019
<b>SURFACE FINISH</b>	Hot Dip Galvanizing - UNI 1461

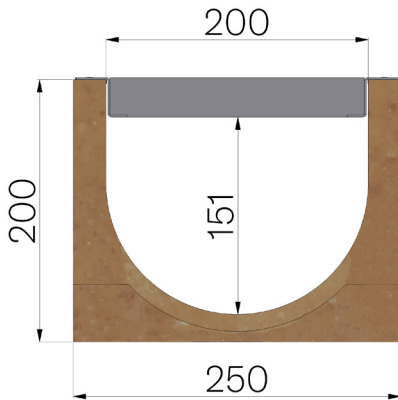

Inner width mm	Runoff section cmq	Weight Kg/each
200	315	27,77