



TECHNICAL SHEET

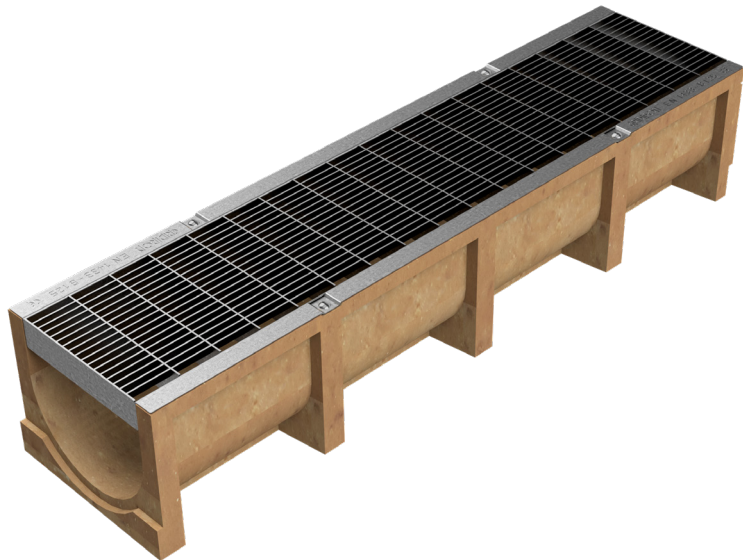

| | |
|-----------------------|--|
| ASSEMBLED CODE | 4520SBA |
| DESCRIPTION | Polymer concrete channel MOD. BASE 200, c/w S235JR steel inlay pressure-locked grating, 40x2-10x2, 55x11 heelguard mesh, installed and locked, hot-dip galvanised. Channel average runoff section sqcm. 315. Load class B125 according to EN 1433:2008 Norm, if installed following manufacturer instructions. |
| PRODUCT LINE | Drainage channel type "M" |
| LOADING CLASS | B125 - EN 1433:2008 |
| 1) CHANNEL | 4520S |
| MATERIAL | Polymer Concrete |
| SERIES TYPE | Base series 200 |
| SECTION TYPE | Standard |
| PROFILE TYPE | Without profiles |
| VERSION TYPE | Normal without built-in slope |
| 2) GRID | 4520BA |
| GRID TYPE | Press-locked |
| MATERIAL | Carbon Steel S235JR acc. to EN 10025-2:2019 |
| SURFACE FINISH | Hot Dip Galvanizing - UNI 1461 |

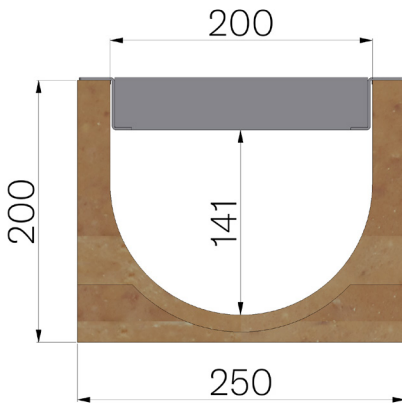

| Inner width mm | Runoff section cmq | Weight Kg/each |
|----------------|--------------------|----------------|
| 200 | 315 | 28,86 |