



TECHNICAL SHEET

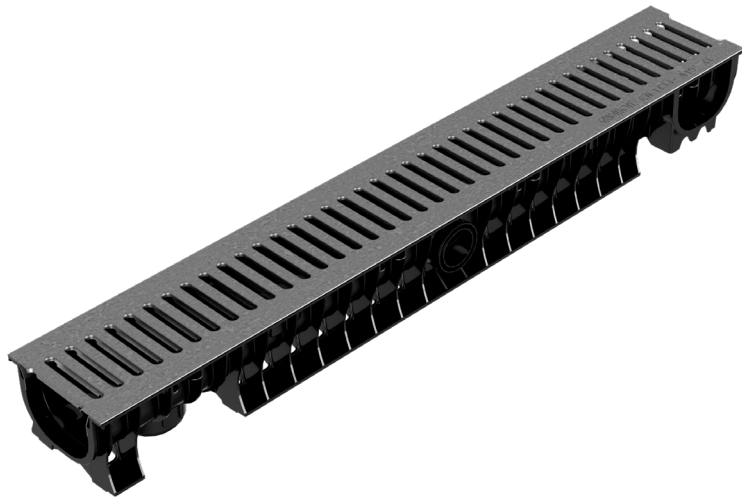

ASSEMBLED CODE	4D0ASLA
DESCRIPTION	ABS channel MOD. PLASTIC FLY 100 LOW, without protective edge rails, c/w galvanised press-formed metal sheet inlay grating, th. 12/10, 8 mm slots, installed, self-locking. Channel average runoff section cm ² 69. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	A15 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	78
1) CHANNEL	4D0AS
MATERIAL	ABS
SERIES TYPE	Plasticfly series 100
SECTION TYPE	Low
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4D00GLA
MATERIAL	Metal sheet DX51D - EN 10346/EN 10143
SURFACE FINISH	Galvanized Z200 - EN 10346

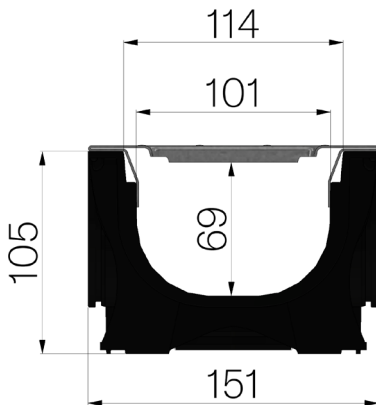

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 151 x H 105	101	69	3,58