


## TECHNICAL SHEET



<b>ASSEMBLED CODE</b>	4D10SLA
<b>DESCRIPTION</b>	ABS channel MOD. PLASTIC FLY 150 , without protective edge rails, c/w galvanised press-formed metal sheet inlay grating, th. 12/10, 8 mm slots, installed, self-locking. Channel average runoff section cm <sup>2</sup> 216. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	D400 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	NPD
<b>QUANTITY PER PACK</b>	35
<b>1) CHANNEL</b>	4D10S
<b>MATERIAL</b>	ABS
<b>SERIES TYPE</b>	Plasticfly series 150
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Without profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>2) GRID</b>	4D10GLA
<b>MATERIAL</b>	Metal sheet DX51D - EN 10346/EN 10143
<b>SURFACE FINISH</b>	Galvanized Z200 - EN 10346

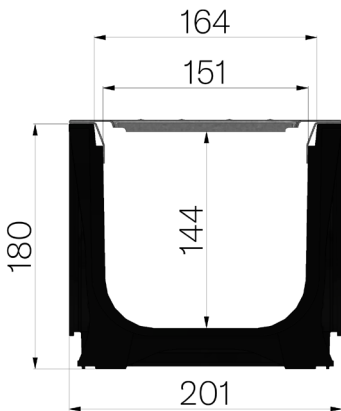

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 201 x H 180	151	216	4,88