


## TECHNICAL SHEET



<b>ASSEMBLED CODE</b>	4D1DSLCI
<b>DESCRIPTION</b>	ABS channel MOD. PLASTIC FLY 150 LOW, with AISI 304 stainless steel protective edge rails, c/w AISI 304 stainless steel press-formed metal sheet grating, th. 12/10, 8 mm slots, installed. Channel average runoff section cm <sup>2</sup> 106. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	A15 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	NPD
<b>QUANTITY PER PACK</b>	55
<b>1) CHANNEL</b>	4D1DS
<b>MATERIAL</b>	ABS
<b>SERIES TYPE</b>	Plasticfly series 150
<b>SECTION TYPE</b>	Low
<b>PROFILE TYPE</b>	Stainless Steel Profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>WATER FLOW LT / SEC</b>	0,5%=8,7 - 1%=12,3 - 1,5%=15,0 - 2%=17,4 - 3%=21,3
<b>2) GRID</b>	4D13LCI
<b>MATERIAL</b>	Inox AISI 304 - X5 CrNi 18 10
<b>SURFACE FINISH</b>	Polished

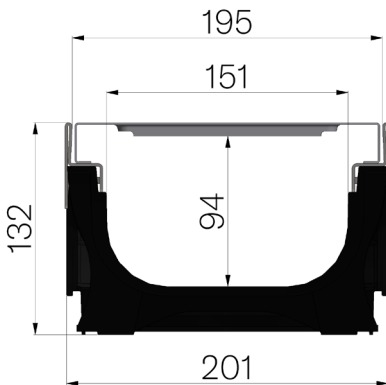

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 201 x H 132	151	106	6,97