


TECHNICAL SHEET



| | |
|--|--|
| ASSEMBLED CODE | 4D1DSX2 |
| DESCRIPTION | ABS channel MOD. PLASTIC FLY 150 LOW, with AISI 304 stainless steel protective edge rails, c/w AISI 304 stainless steel pressure-locked grating, 25x2-10x2, 55x11 heelguard mesh, installed and locked, pickled. Channel average runoff section cm ² 106. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions. |
| PRODUCT LINE | Drainage channel type "M" |
| STANDARD | EN 1433:2008 |
| LOADING CLASS | C250 - EN 1433:2008 |
| INTENDED USE OR USES OF THE PRODUCT | Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate. |
| DURABILITY | NPD |
| QUANTITY PER PACK | 55 |
| 1) CHANNEL | 4D1DS |
| MATERIAL | ABS |
| SERIES TYPE | Plasticfly series 150 |
| SECTION TYPE | Low |
| PROFILE TYPE | Stainless Steel Profiles |
| VERSION TYPE | Normal without built-in slope |
| WATER FLOW LT / SEC | 0,5%=8,7 - 1%=12,3 - 1,5%=15,0 - 2%=17,4 - 3%=21,3 |
| 2) GRID | 4D13X2 |
| GRID TYPE | Press-locked |
| MATERIAL | Inox AISI 304 - X5 CrNi 18 10 |
| SURFACE FINISH | Pickled |

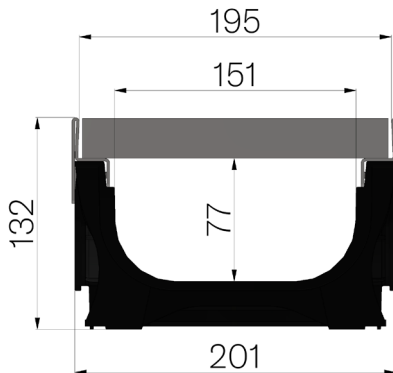

| Article dimensions mm | Inner width mm | Runoff section cmq | Weight Kg/each |
|-----------------------|----------------|--------------------|----------------|
| 1000 x 201 x H 132 | 151 | 106 | 9,39 |