


TECHNICAL SHEET



CODE	4D21G1
DESCRIPTION	Pressure-locked grating 25x2-10x2 33x33, for channel FLY 200 with ABS edge rails, hot-dip galvanized, loading class C250.
PRODUCT LINE	Press-locked
MATERIAL	S235JR steel - EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461
STANDARD	EN 1090-1:2009 + A1:2011
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Galvanized surface as per standard EN ISO 1461. Galvanizing durability according to EN ISO 14713.
CRUSH RESISTANCE	NPD
FIRE RESISTANCE	NPD
REACTION TO FIRE	Class A1 according to standard EN 13501-1
CADIUM RELEASE	NPD
RADIOACTIVITY EMISSION	4D21G1
LOADING CLASS	C250 - EN 1433:2008
DIMENSIONAL TOLERANCES	UNI EN 1090-2 e UNI 11002-1

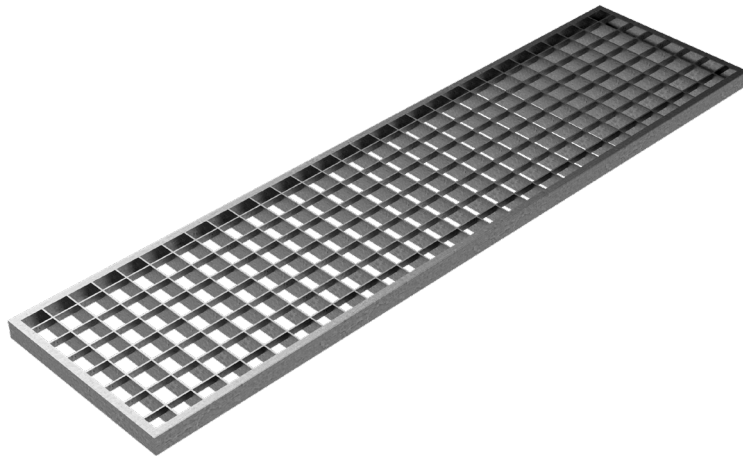

Article dimensions mm	Weight Kg/each
255 x 999 x H 25	5,1