


TECHNICAL SHEET



ASSEMBLED CODE	4D22SG1
DESCRIPTION	ABS channel MOD. PLASTIC FLY 200, with galvanised protective edge rails, c/w S235JR pressure-locked grating, 25x2-10x2, 33x33 mesh, installed and locked, hot-dip galvanised. Channel average runoff section sqcm. 381. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	C250 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	24
1) CHANNEL	4D22S
MATERIAL	ABS
SERIES TYPE	Plasticfly series 200
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
WATER FLOW LT / SEC	0,5%=55,3 - 1%=78,2 - 1,5%=95,8 - 2%=110 - 3%=135
2) GRID	4D22G1
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

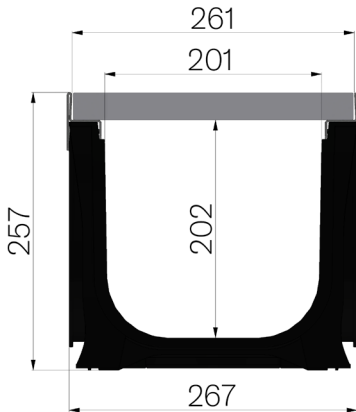

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 257 x H 267	201	381	13,68