


TECHNICAL SHEET



ASSEMBLED CODE	4D2BSGS
DESCRIPTION	ABS channel MOD. PLASTIC FLY 200 LOW, with ABS protective edge rails, c/w 2 x GJS500-7 ductile iron gratings, installed and locked, painted. Channel average runoff section sqcm. 283. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	C250 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	32
1) CHANNEL	4D2BS
MATERIAL	ABS
SERIES TYPE	Plasticfly series 200
SECTION TYPE	Low
PROFILE TYPE	ABS Profiles
VERSION TYPE	Normal without built-in slope
WATER FLOW LT / SEC	0,5%=31,3 - 1%=44,3 - 1,5%=54,2 - 2%=62,6 - 3%=76
2) GRID	4D22GS1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

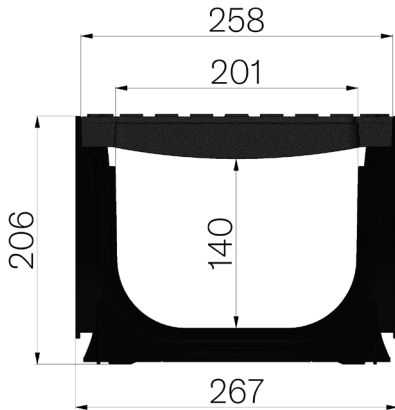

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 267 x H 206	201	283	26,51