



TECHNICAL SHEET

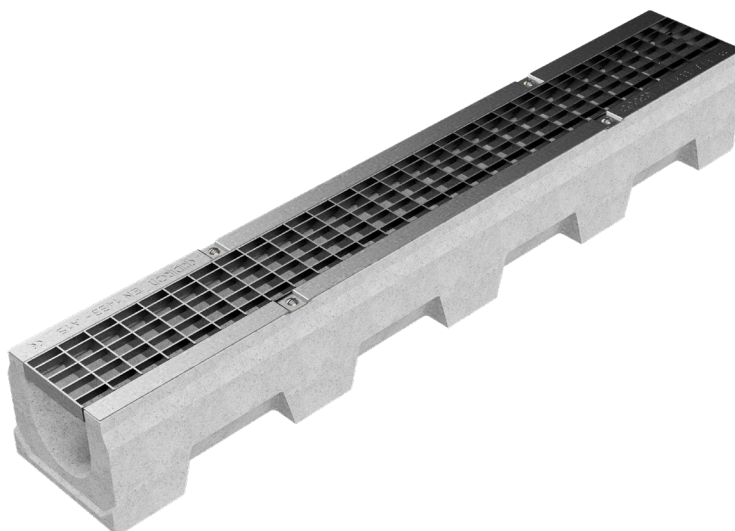

ASSEMBLED CODE	4F00SA
DESCRIPTION	Vibro-compressed concrete channel MOD. VIBRO-BASE 100 (H1), H140 mm,c/w S235JR steel inlay pressure-locked grating, 20x2-10x2, 33x22 mesh, installed and locked, hot-dip galvanised. Channel average runoff section sqcm. 99. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	A15 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
1) CHANNEL	4F00S
MATERIAL	Vibro-compressed Concrete
SERIES TYPE	Vibrobase series 100
SECTION TYPE	H1
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
WATER FLOW LT / SEC	0,5%=7,1 - 1%=10 - 1,5%=12,3 - 2%=14,2 - 3%=17,4
2) GRID	4F00A
GRID TYPE	Press-locked
MATERIAL	S235JR steel - EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461
TYPE OF GRATING	Flat bar 20x2 Mesh 33x22

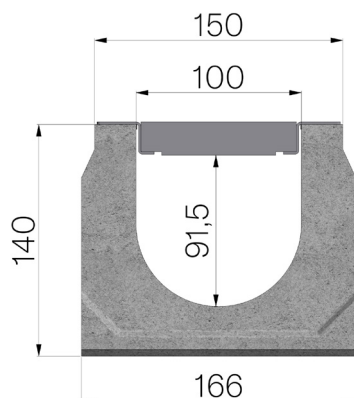

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 166 x H 140 mm	100	99	30,49