



# TECHNICAL SHEET

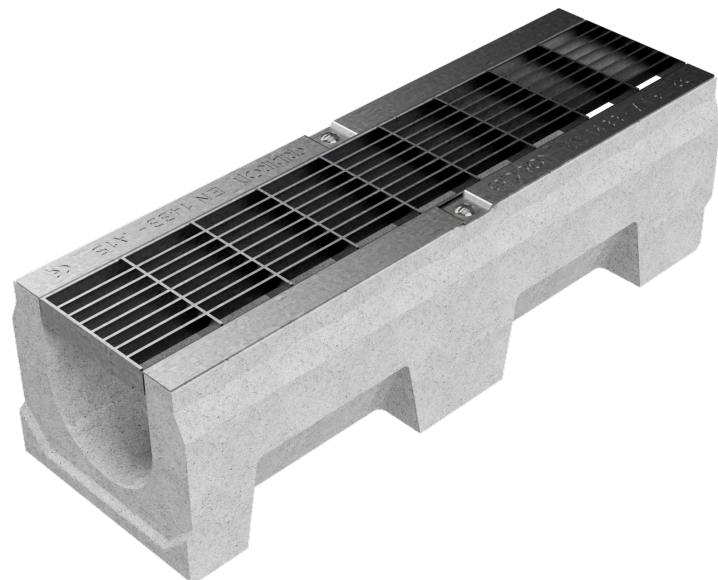

<b>ASSEMBLED CODE</b>	4F05SAA
<b>DESCRIPTION</b>	Vibro-compressed concrete channel MOD. VIBRO-BASE 100 (H1), h140 mm, L. 500 mm, c/w S235JR steel inlay pressure-locked grating, 20x2-10x2, 55x11 heelguard mesh, installed and locked, hot-dip galvanised. Channel average runoff section cm <sup>2</sup> 99. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	A15 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
<b>1) CHANNEL</b>	4F05S
<b>MATERIAL</b>	Vibro-compressed Concrete
<b>SERIES TYPE</b>	Vibrobase series 100
<b>SECTION TYPE</b>	H1
<b>PROFILE TYPE</b>	Without profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>2) GRID</b>	4F05AA
<b>GRID TYPE</b>	Press-locked
<b>MATERIAL</b>	Carbon Steel S235JR acc. to EN 10025-2:2019
<b>SURFACE FINISH</b>	Hot Dip Galvanizing - UNI 1461

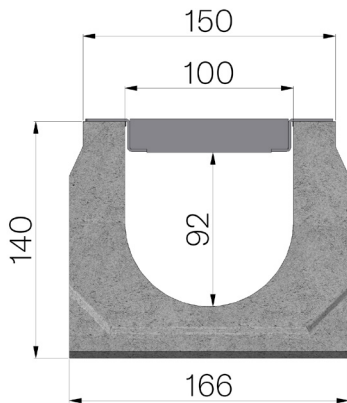

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
500 x 166 x H 140	100	99	15,52