



TECHNICAL SHEET

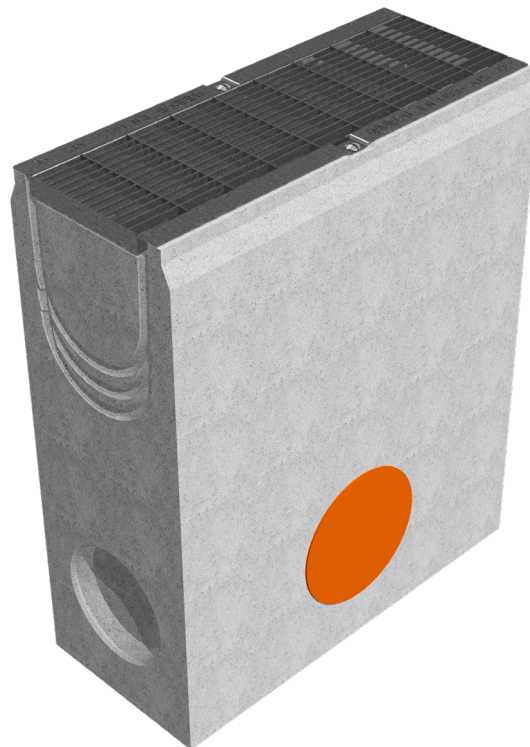

ASSEMBLED CODE	4F10PZAA
DESCRIPTION	Fiber reinforced concrete sump unit, L.500 mm, for channel MOD. VIBRO-BASE 150, c/w S235JR steel inlay pressure-locked grating, 20x2-10x2, 55x11 heelguard mesh, installed, hot-dip galvanized. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Fiber reinforced concrete sump units
STANDARD	EN 1433:2008
LOADING CLASS	A15 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
1) CHANNEL	4F10PZ
MATERIAL	Fiber reinforced concrete
SERIES TYPE	Vibrobase series 150
SECTION TYPE	H1
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4511AA
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

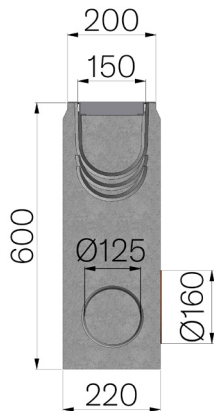

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 220 x H 600	150	223	Ø160	74,34