



TECHNICAL SHEET

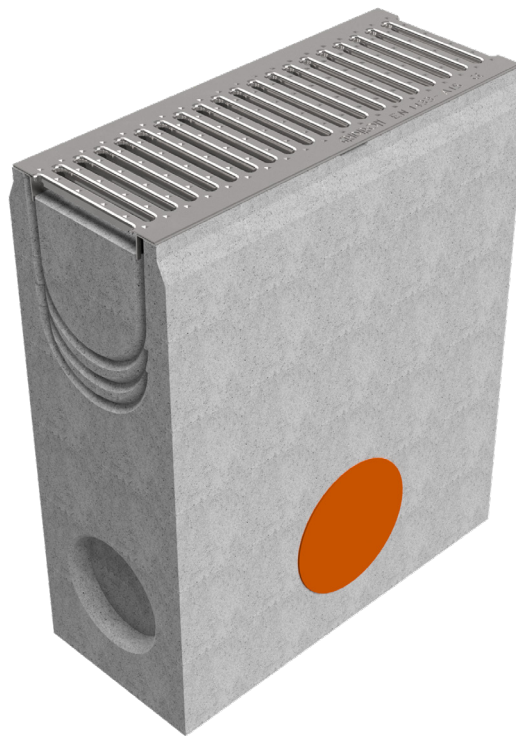

ASSEMBLED CODE	4F10PZGLI
DESCRIPTION	Fiber reinforced concrete sump unit, L.500 mm, for channel MOD. VIBRO-BASE 150, c/w AISI 304 stainless steel inlay press-formed metal sheet grating, 8 mm slots, Th. 12/10, installed, self-locking. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Fiber reinforced concrete sump units
STANDARD	EN 1433:2008
LOADING CLASS	A15 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	8
1) CHANNEL	4F10PZ
MATERIAL	Constant flow concrete
SERIES TYPE	Vibrobase series 150
SECTION TYPE	H1
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4F15GLI
MATERIAL	Inox AISI 304 - X5 CrNi 18 10
SURFACE FINISH	None

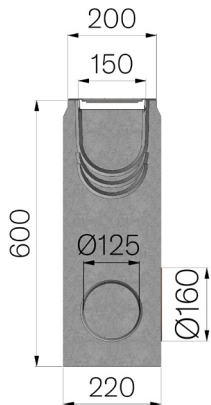

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 220 x H 600	150	223	Ø160	74,05