


# TECHNICAL SHEET



<b>ASSEMBLED CODE</b>	4F10SGL
<b>DESCRIPTION</b>	Vibro-compressed concrete channel MOD. VIBRO-BASE 150 (H1), H200 mm, c/w galvanised steel inlay press-formed metal sheet grating, 8 mm slots, Th. 15/10, installed, self-locking. Channel average runoff section cm <sup>2</sup> 223. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	A15 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
<b>1) CHANNEL</b>	4F10SS
<b>MATERIAL</b>	Vibro-compressed Concrete
<b>SERIES TYPE</b>	Vibrobase series 150
<b>SECTION TYPE</b>	H1
<b>PROFILE TYPE</b>	Without profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>WATER FLOW LT / SEC</b>	0,5%=7,1 - 1%=10 - 1,5%=12,3 - 2%=14,2 - 3%=17,4
<b>2) GRID</b>	4F10GL
<b>MATERIAL</b>	Metal sheet DX51D - EN 10346/EN 10143
<b>SURFACE FINISH</b>	Galvanized Z200 - EN 10346

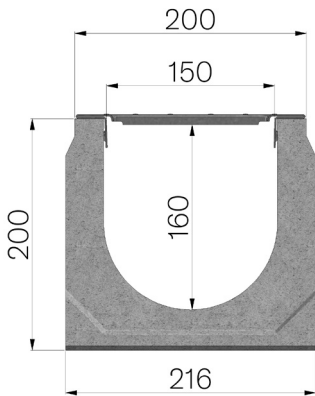

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 216 x H 200	150	223	47,17