



TECHNICAL SHEET

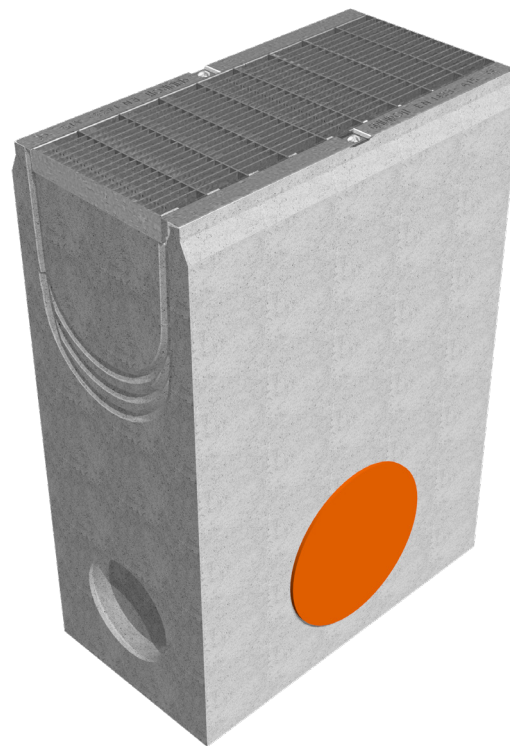

ASSEMBLED CODE	4F20PZAA
DESCRIPTION	Fiber reinforced concrete sump unit, L. 500 mm, for channel MOD. VIBRO-BASE 200, c/w S235JR steel inlay pressure-locked grating, 30x2-10x2, 55x11 heelguard mesh, installed and locked, hot-dip galvanised. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Fiber reinforced concrete sump units
STANDARD	EN 1433:2008
LOADING CLASS	A15 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
1) CHANNEL	4F20PZ
MATERIAL	Constant flow concrete
SERIES TYPE	Vibrobase series 200
SECTION TYPE	H1
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4521AA
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

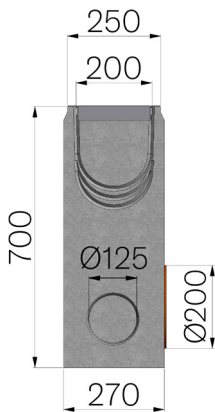

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 270 x H 700	200	397	Ø200	99,93