



TECHNICAL SHEET

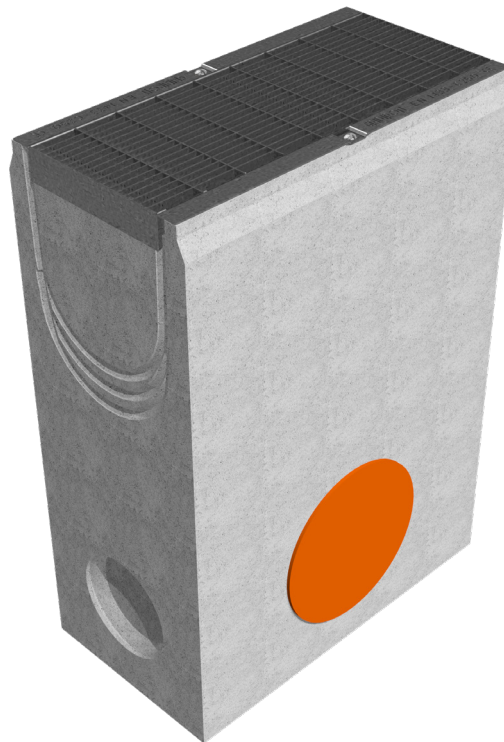

| | |
|--|---|
| ASSEMBLED CODE | 4F20PZBA |
| DESCRIPTION | Fiber reinforced concrete sump unit, L. 500 mm, for channel MOD. VIBRO-BASE 200, c/w S235JR steel inlay pressure-locked grating, 40x2-10x2, 55x11 heelguard mesh, installed and locked, hot-dip galvanised. Load class B125 according to EN 1433:2008 Norm, if installed following manufacturer instructions. |
| STANDARD | EN 1433:2008 |
| INTENDED USE OR USES OF THE PRODUCT | Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate. |
| DURABILITY | Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008) |
| 1) CHANNEL | 4F20PZ |
| MATERIAL | Constant flow concrete |
| SERIES TYPE | Vibrobase series 200 |
| SECTION TYPE | H1 |
| PROFILE TYPE | Without profiles |
| VERSION TYPE | Normal without built-in slope |
| 2) GRID | 4521BA |
| GRID TYPE | Press-locked |
| MATERIAL | Carbon Steel S235JR acc. to EN 10025-2:2019 |
| SURFACE FINISH | Hot Dip Galvanizing - UNI 1461 |

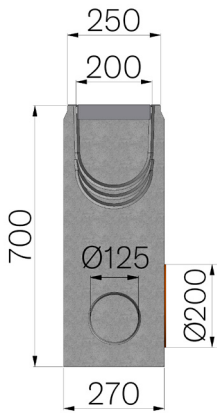

| Article dimensions mm | Inner width mm | Runoff section cmq | Bottom outlet mm | Weight Kg/each |
|-----------------------|----------------|--------------------|------------------|----------------|
| 500 x 270 x H 700 | 200 | 397 | Ø200 | 100,77 |