


TECHNICAL SHEET



ASSEMBLED CODE	4F20SGS
DESCRIPTION	Vibro-compressed concrete channel MOD. VIBRO-BASE 200 (H1), H260 mm, c/w 2 x GJS500-7 ductile iron inlay gratings, painted, installed and locked. Channel average runoff section sqcm. 397. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
LOADING CLASS	C250 - EN 1433:2008
1) CHANNEL	4F20S
MATERIAL	Vibro-compressed Concrete
SERIES TYPE	Vibrobase series 200
SECTION TYPE	H1
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4520GS1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

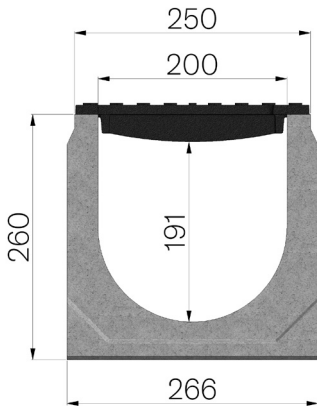

Inner width mm	Runoff section cmq	Weight Kg/each
200	397	81,86