



## TECHNICAL SHEET

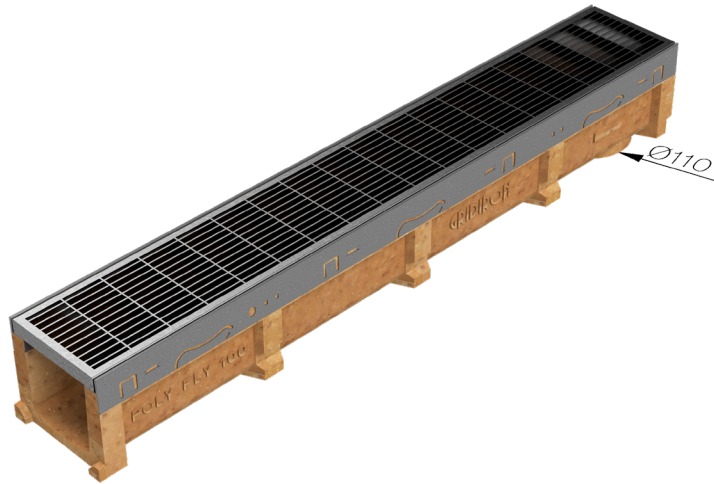

<b>ASSEMBLED CODE</b>	4G02SG2
<b>DESCRIPTION</b>	Polymer concrete channel MOD. POLY FLY 100, with galvanized steel protective edge rails, c/w S235JR steel pressure-locked grating, 20x2-10x2, 55x11 heelguard mesh, hot-dip galvanised, installed and locked. Channel runoff section sqcm.108. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	C250 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Structural carbon steel grating where vehicular and/or pedestrian transit is expected.
<b>DURABILITY</b>	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
<b>QUANTITY PER PACK</b>	42
<b>1) CHANNEL</b>	4G02S
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Polyfly series 100
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Galvanized edge
<b>VERSION TYPE</b>	Normal without built-in slope
<b>2) GRID</b>	4RPOGPB
<b>GRID TYPE</b>	Press-locked
<b>MATERIAL</b>	Carbon Steel S235JR acc. to EN 10025-2:2019
<b>SURFACE FINISH</b>	Hot Dip Galvanizing - UNI 1461

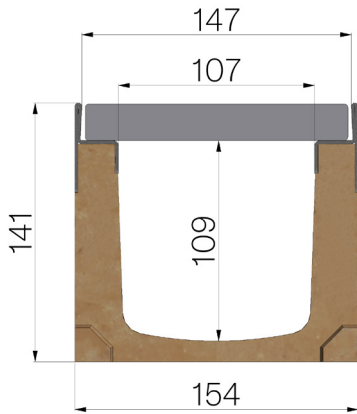

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 154 x H 141	107	108	110	17,38