



TECHNICAL SHEET

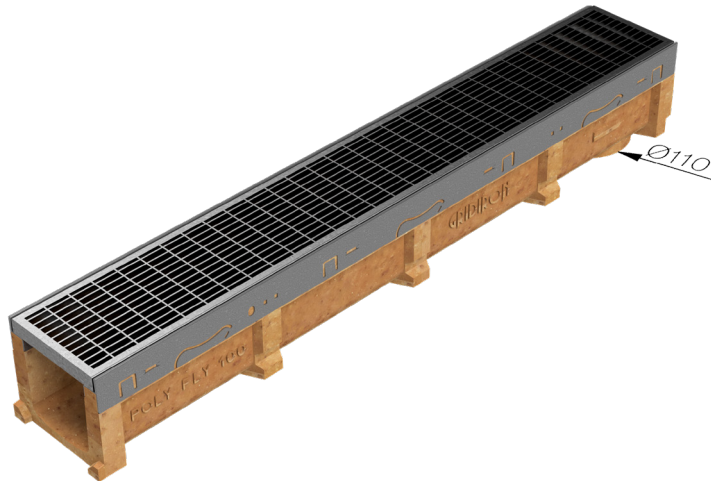

ASSEMBLED CODE	4G02SG3
DESCRIPTION	Polymer concrete channel MOD. POLY FLY 100, with galvanized steel protective edge rails, c/w S235JR steel pressure-locked grating, 20x2-10x2, 33x11 heelguard mesh, hot-dip galvanized, installed and locked. Channel runoff section sqcm. 108. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	C250 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Structural carbon steel grating where vehicular and/or pedestrian transit is expected.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	42
1) CHANNEL	4G02S
MATERIAL	Polymer Concrete
SERIES TYPE	Polyfly series 100
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4RPOGPA
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

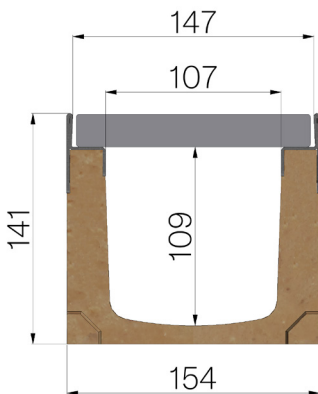

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 154 x H 141	107	108	17,95