



## TECHNICAL SHEET

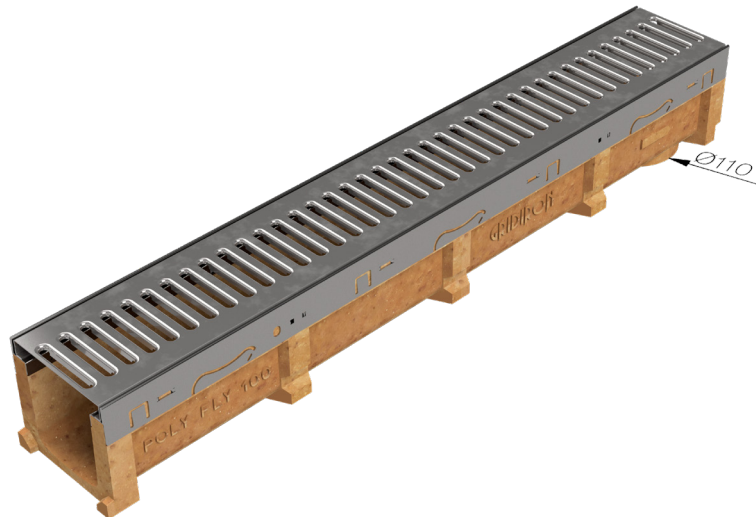

<b>ASSEMBLED CODE</b>	4G03SLCI
<b>DESCRIPTION</b>	Polymer concrete channel MOD. POLY FLY 100, with AISI 304 stainless steel protective edge rails, c/w AISI 304 stainless steel press-formed metal sheet grating, 12/10, 8 mm slots, installed. Channel runoff section cm <sup>2</sup> 108. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	A15 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	NPD
<b>QUANTITY PER PACK</b>	42
<b>1) CHANNEL</b>	4G03S
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Polyfly series 100
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Stainless Steel Profiles
<b>VERSION TYPE</b>	Normal without built-in slope
<b>2) GRID</b>	4D01LCI
<b>MATERIAL</b>	Inox AISI 304 - X5 CrNi 18 10

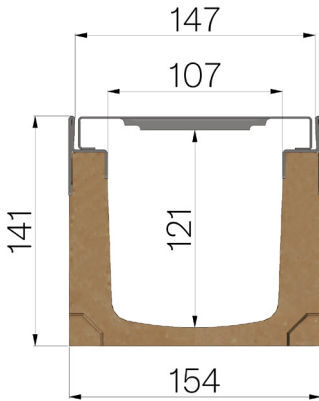

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 154 x H 141	107	108	Ø110	16,4