


TECHNICAL SHEET



ASSEMBLED CODE	4G22PZG1
DESCRIPTION	Polymer concrete sump unit, for channel MOD. POLY FLY 200, th. 20/10, with lateral outlet Ø200 mm, L. 500 mm, c/w S235JR steel pressure-locked grating, 25x2-10x2, 33x33 mesh, hot-dip galvanised, installed and locked. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	C250 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
1) CHANNEL	4G22PZ
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SERIES TYPE	Polyfly series 200
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4D26G1
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

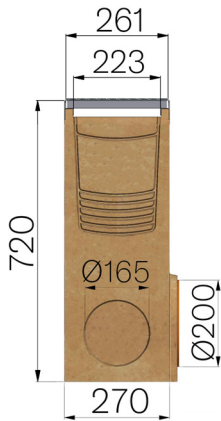

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 270 x H 720	223	448	Ø200	62,55