



## TECHNICAL SHEET

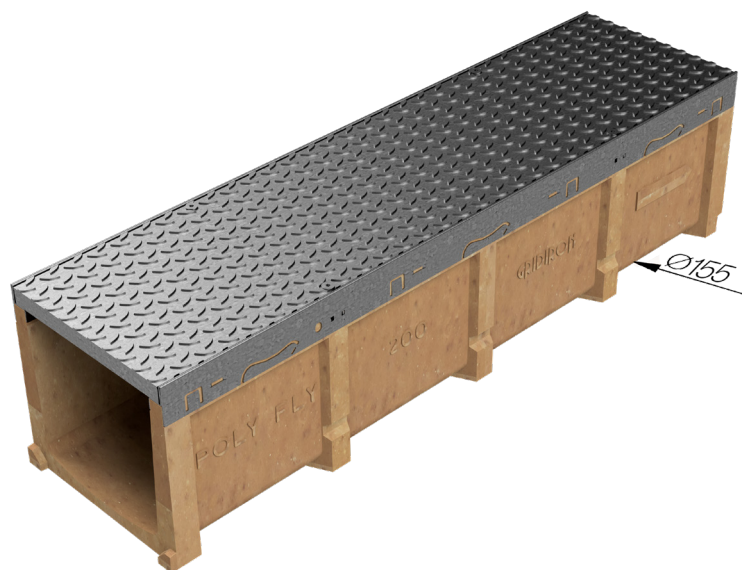

<b>ASSEMBLED CODE</b>	4G22SP
<b>DESCRIPTION</b>	Polymer concrete channel MOD. POLY FLY 200, with galvanized steel protective edge rails, c/w embossed metal sheet solid plate Th. 30/10, reinforced and hot-dip galvanised, installed and locked. Channel runoff section cm <sup>2</sup> 448. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	D400 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	NPD
<b>QUANTITY PER PACK</b>	24
<b>1) CHANNEL</b>	4G22S
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Polyfly series 200
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Galvanized edge
<b>VERSION TYPE</b>	Normal without built-in slope
<b>WATER FLOW LT / SEC</b>	0,5%=55,3 - 1%=78,2 - 1,5%=95,8 - 2%=110 - 3%=135
<b>2) METAL SHEET PLATE</b>	4D21P
<b>TYPE OF METAL PLATE</b>	Metal sheet plates for channels
<b>MATERIAL</b>	Carbon Steel S235JR acc. to EN 10025-2:2019
<b>UPPER SHEET METAL</b>	Embossed metal sheet plate 30/10

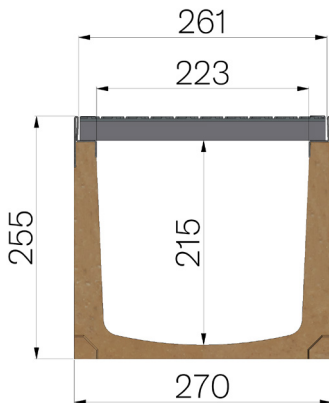

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 270 x H 255	223	448	Ø155	54,18