


TECHNICAL SHEET



ASSEMBLED CODE	4G23PIX3
DESCRIPTION	Polymer concret sump unit, for channel MOD. POLY FLY 200, th. 20/10, with lateral outlet Ø200 mm, L.500 mm, pickled, c/w AISI 304 stainless steel pressure-locked grating, 25x2-10x2 33x11 heelguard mesh, pickled, installed and locked. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	C250 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
1) CHANNEL	4G23PP
MATERIAL	Polymer Concrete
SERIES TYPE	Polyfly series 200
SECTION TYPE	H1
PROFILE TYPE	Stainless Steel Profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4D23X3
GRID TYPE	Press-locked
MATERIAL	Inox AISI 304 - X5 CrNi 18 10
SURFACE FINISH	Pickled

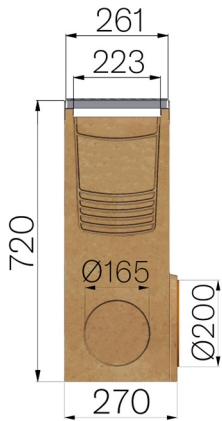

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 270 x H 720	223	448	Ø200	63,65