


TECHNICAL SHEET



| | |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ASSEMBLED CODE | 4G23SX1 |
| DESCRIPTION | Polymer concrete channel MOD. POLY FLY 200, with AISI 304 stainless steel protective edge rails, c/w AISI 304 stainless steel pressure-locked grating, 25x2-10x2, 55x11 heelguard mesh, pickled, installed and locked. Channel runoff section cm ² 448. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions. !da duplicazione! |
| PRODUCT LINE | Drainage channel type "M" |
| STANDARD | EN 1433:2008 |
| LOADING CLASS | C250 - EN 1433:2008 |
| INTENDED USE OR USES OF THE PRODUCT | Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate. |
| DURABILITY | NPD |
| QUANTITY PER PACK | 24 |
| 1) CHANNEL | 4G23S |
| MATERIAL | Polymer Concrete |
| SERIES TYPE | Polyfly series 200 |
| SECTION TYPE | Standard |
| PROFILE TYPE | Stainless Steel Profiles |
| VERSION TYPE | Normal without built-in slope |
| 2) GRID | 4D23X1 |
| GRID TYPE | Press-locked |
| MATERIAL | Inox AISI 304 - X5 CrNi 18 10 |
| SURFACE FINISH | Pickled |

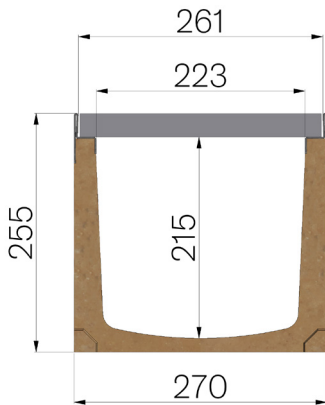

| Article dimensions mm | Inner width mm | Runoff section cmq | Bottom outlet mm | Weight Kg/each |
|-----------------------|----------------|--------------------|------------------|----------------|
| 1000 x 270 x H 255 | 223 | 448 | Ø155 | 35,42 |