



TECHNICAL SHEET

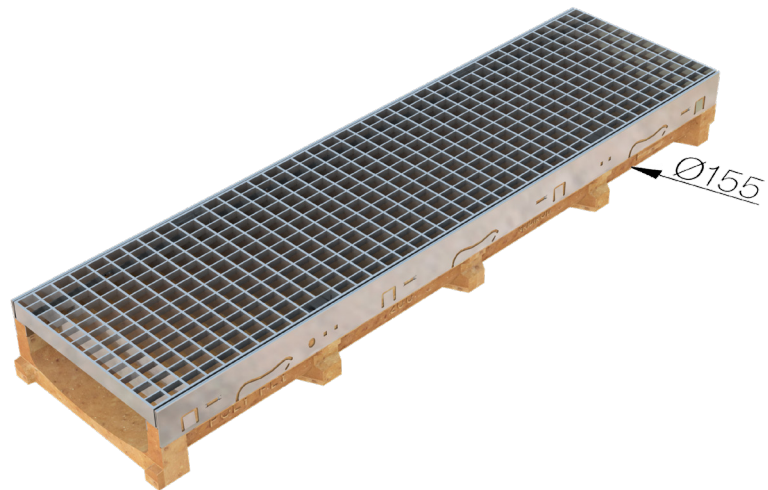

ASSEMBLED CODE	4G2DSX4
DESCRIPTION	Polymer concrete channel MOD. POLY FLY 200 LOW, with AISI 304 stainless steel protective edge rails, c/w AISI 304 stainless steel pressure-locked grating, 25x3-10x2, 25x25 mesh, pickled, installed and locked. Channel runoff section cm ² 137. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	32
1) CHANNEL	4G2DS
MATERIAL	Polymer Concrete
SERIES TYPE	Polyfly series 200
SECTION TYPE	Low
PROFILE TYPE	Stainless Steel Profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4D23X4
GRID TYPE	Press-locked
MATERIAL	Inox AISI 304 - X5 CrNi 18 10
SURFACE FINISH	Pickled

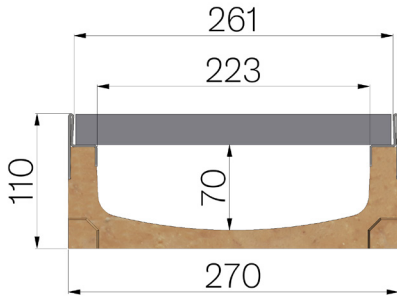

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 270 x H 110	223	137	Ø155	26,51