



TECHNICAL SHEET

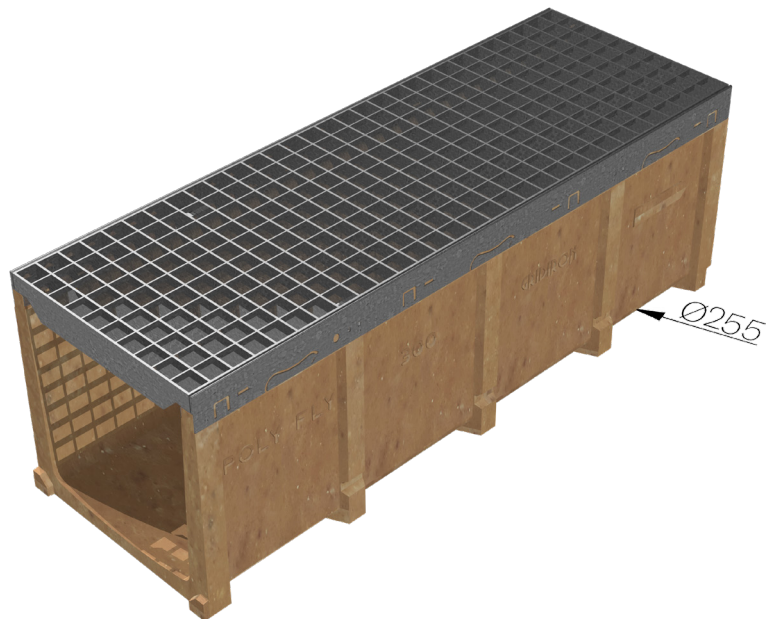

| | |
|--|--|
| ASSEMBLED CODE | 4G32SG3 |
| DESCRIPTION | Polymer concrete channel MOD. POLY FLY 300 HIGH, H345 mm., with galvanized steel protective edge rails, c/w S235JR steel pressure-locked grating, 50x3-10x2, 33x33 mesh, hot-dip galvanized, installed and locked. Channel runoff section cm ² 855. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions. |
| PRODUCT LINE | Drainage channel type "M" |
| STANDARD | EN 1433:2008 |
| LOADING CLASS | D400 - EN 1433:2008 |
| INTENDED USE OR USES OF THE PRODUCT | Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate. |
| DURABILITY | NPD |
| QUANTITY PER PACK | 24 |
| 1) CHANNEL | 4G32S |
| MATERIAL | Polymer Concrete |
| SERIES TYPE | Polyfly series 300 |
| SECTION TYPE | High |
| PROFILE TYPE | Galvanized edge |
| VERSION TYPE | Normal without built-in slope |
| WATER FLOW LT / SEC | 0,5%=128 - 1%=181 - 1,5%=221 - 2%=255 - 3%=313 |
| 2) GRID | 4D32G3 |
| GRID TYPE | Press-locked |
| MATERIAL | Carbon Steel S235JR acc. to EN 10025-2:2019 |
| SURFACE FINISH | Hot Dip Galvanizing - UNI 1461 |

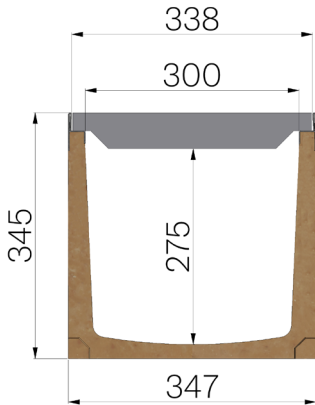

| Article dimensions mm | Inner width mm | Runoff section cmq | Bottom outlet mm | Weight Kg/each |
|-----------------------|----------------|--------------------|------------------|----------------|
| 1000 x 347 x H 345 | 300 | 855 | Ø255 | 61,14 |