



TECHNICAL SHEET

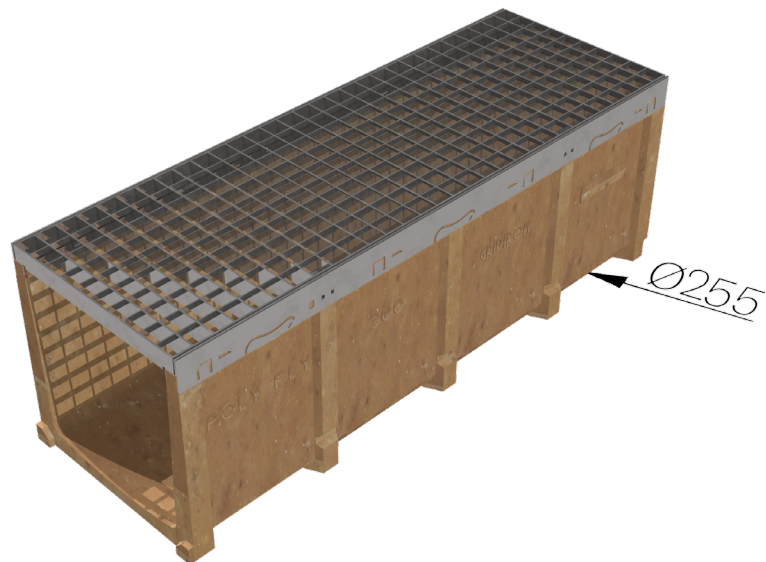

ASSEMBLED CODE	4G33SX1
DESCRIPTION	Polymer concrete channel MOD. POLY FLY 300 HIGH, H345 mm, with AISI 304 stainless steel protective edge rails, c/w AISI 304 stainless steel pressure-locked grating, 30x3-10x2, 33x33 mesh, pickled, installed and locked. Channel runoff section cm ² 855. Load class B125 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	B125 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	24
1) CHANNEL	4G33S
MATERIAL	Polymer Concrete
SERIES TYPE	Polyfly series 300
SECTION TYPE	High
PROFILE TYPE	Stainless Steel Profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4D33X1
GRID TYPE	Press-locked
MATERIAL	Inox AISI 304 - X5 CrNi 18 10
SURFACE FINISH	Pickled

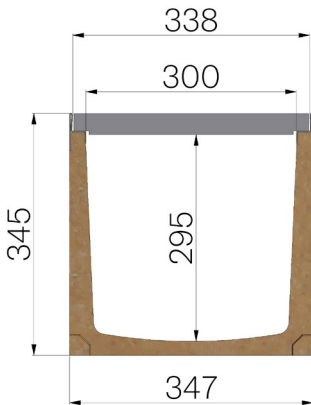

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 347 x H 345	300	855	61,14