



# TECHNICAL SHEET

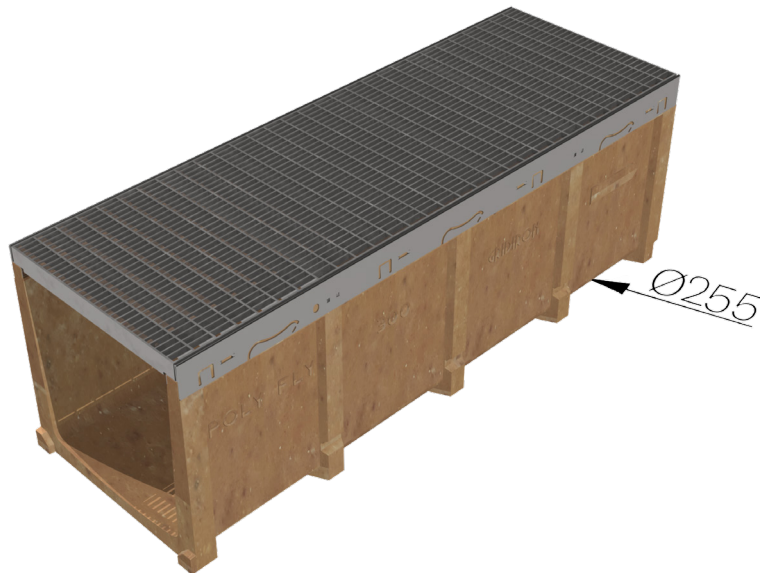

<b>ASSEMBLED CODE</b>	4G33SX2
<b>DESCRIPTION</b>	Polymer concrete channel MOD. POLY FLY 300 HIGH, H345 mm, with AISI 304 stainless steel protective edge rails, c/w AISI 304 stainless steel pressure-locked grating, 30x3-10x2, 33x11 mesh, pickled, installed and locked. Channel runoff section sqcm. 855. Load class B125 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	B125 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
<b>QUANTITY PER PACK</b>	24
<b>1) CHANNEL</b>	4G33S
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Polyfly series 300
<b>SECTION TYPE</b>	High
<b>PROFILE TYPE</b>	Stainless Steel Profiles
<b>VERSION TYPE</b>	Normal without built-in slope

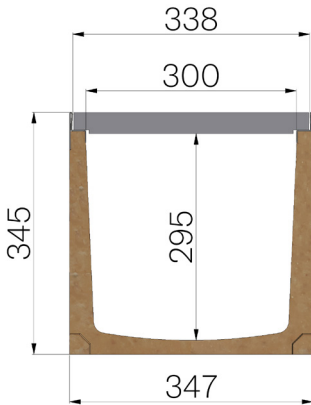

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 347 x H 345	300	855	59,67