


## TECHNICAL SHEET



<b>ASSEMBLED CODE</b>	4G3CSGS
<b>DESCRIPTION</b>	P150 LOWERED polymer concrete drain channel, with Gridiron's special galvanized edge rails, c/w no. 2 GJS500-7 painted ductile iron grids, dim. 145x500 H20, set-up for side-locking, runoff section cm <sup>2</sup> 40. Loading class C250 accordingly to Standards UNI-EN 1433:2008 Norm as for installation instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	D400 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	NPD
<b>QUANTITY PER PACK</b>	24
<b>1) CHANNEL</b>	4G3CS
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	Polyfly series 300
<b>SECTION TYPE</b>	Low
<b>PROFILE TYPE</b>	Galvanized edge
<b>VERSION TYPE</b>	Normal without built-in slope
<b>2) GRID</b>	4D32GS1
<b>GRID TYPE</b>	Ductile-iron Grid
<b>MATERIAL</b>	Ductile-Iron GJS500-7 : EN1563
<b>SURFACE FINISH</b>	Paint coating

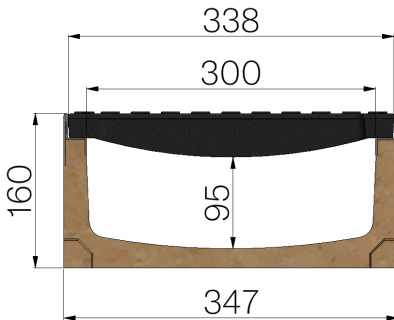

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 347 x H 160	300	40	Ø255	60,37