


TECHNICAL SHEET



ASSEMBLED CODE	4PG3SGF
DESCRIPTION	Channel P265 in POLYMERIC concrete, with cast-iron edge protection rails, complete with no. 2 cast-iron gratings GJS500-7 mm.265x500 h30 blocked, average drainage cross-section 365 cm ² , load class F900 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	F900 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	16
1) CHANNEL	4PG3S
MATERIAL	Polymer Concrete
SERIES TYPE	P series 265
SECTION TYPE	Standard
PROFILE TYPE	ductile iron PROFILES
VERSION TYPE	Normal without built-in slope
2) GRID	4R03GSF1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

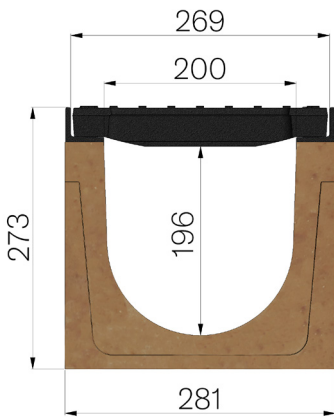

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 281 x H 273	200	365	Ø210	59,3