



TECHNICAL SHEET

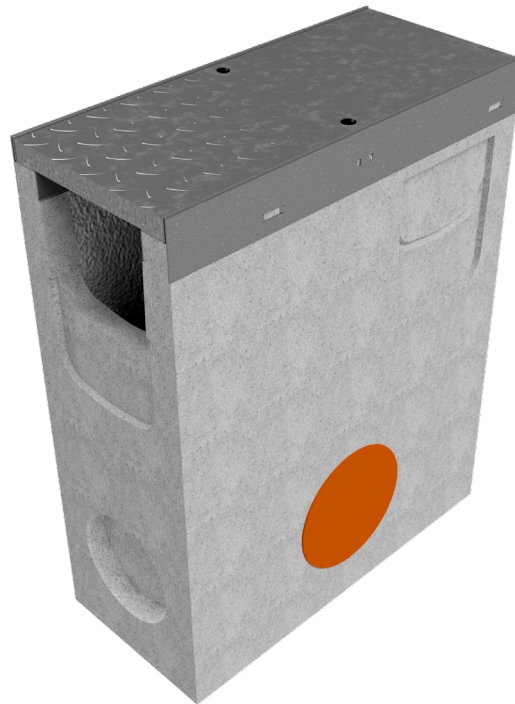

ASSEMBLED CODE	4R02PZP
DESCRIPTION	Fiber reinforced concrete Sump unit for channel MOD. R210, c/w sleeve with seal and cap for lateral outlet Ø160 mm, n.1 knock-out section for additional drainage point Ø125 mm and a lateral connector sleeve for "T" intersection, c/w embossed metal sheet plate, th. 30/10, reinforced, installed and locked, hot-dip galvanized, dim. 210x1000 H25 mm. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer.
PRODUCT LINE	Fiber reinforced concrete sump units
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	8
1) CHANNEL	4R02PZ
MATERIAL	Constant flow concrete
SERIES TYPE	R series 210
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) METAL SHEET PLATE	4RP6MP
TYPE OF METAL PLATE	Metal sheet plates for channels
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
UPPER SHEET METAL	Embossed metal sheet plate 30/10

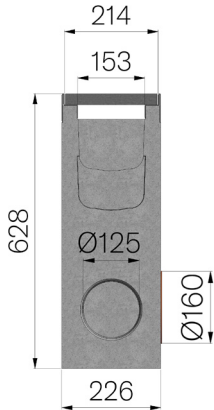

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 226 x H 628	153	216	160	86