



TECHNICAL SHEET

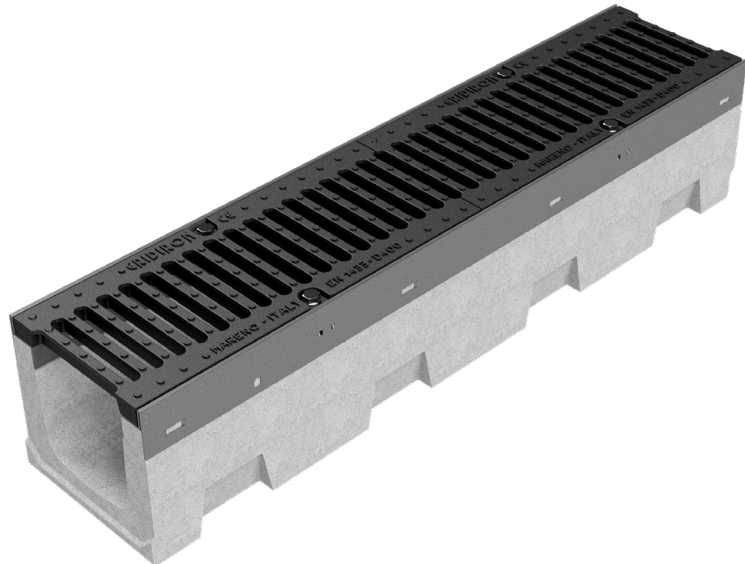

ASSEMBLED CODE	4R02SGG
DESCRIPTION	Vibro-compressed concrete channel MOD. R210, with galvanized protective edge rails, c/w n. 2 x GJS500-7 ductile iron gratings dim. 210x500 H25 mm, installed and locked, painted. Channel runoff section cm ² 216. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	20
1) CHANNEL	4R02S
MATERIAL	Vibro-compressed Concrete
SERIES TYPE	R series 210
SECTION TYPE	H1
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
WATER FLOW LT / SEC	0,5%=20,1 - 1%=28,2 - 1,5%=34,8 - 2%=40,2 - 3%=49,3
2) GRID	4R02GS2
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

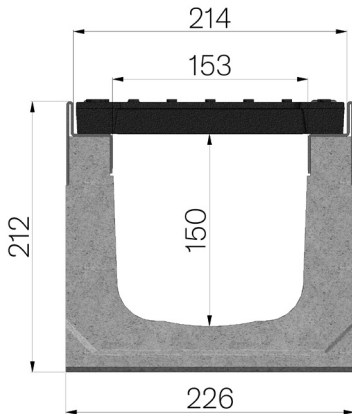

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 226 x H 212	153	216	64