



TECHNICAL SHEET

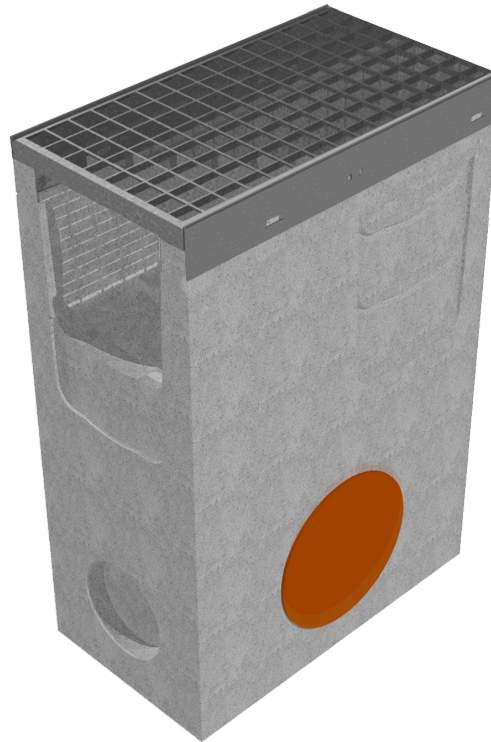

ASSEMBLED CODE	4R03PZGP
DESCRIPTION	Fiber reinforced concrete sump unit for channel MOD. R265, c/w lateral outlet with sleeve with seal and cap Ø200 mm, n.1 knock-out section for additional drainage point Ø125 mm and a lateral connector sleeve for "T" intersection, c/w S235JR steel pressure-locked grating, bearing bar 30x3 mm, transverse bar 10x2 mm, 33x33 mm mesh, installed and locked, hot-dip galvanized, dim.265x500 H30 mm. Load class C250 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Fiber reinforced concrete sump units
LOADING CLASS	C250 - EN 1433:2008
QUANTITY PER PACK	16
1) CHANNEL	4R03PZ
MATERIAL	Constant flow concrete
SERIES TYPE	R series 265
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4RP3GP
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

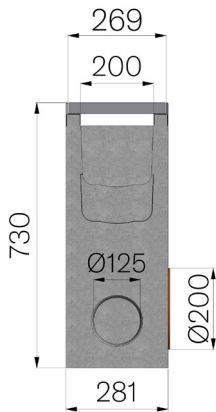

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 281 x H 730	200	376	200	110,15