


# TECHNICAL SHEET



|  |   |
|--|---|
| <b>CODE</b>                                | 4R15GPC   |
| <b>DESCRIPTION</b>                         | Pressure locked grating, BB 50x5, mesh 22x66, set up for anchoring to R595 channel, galvanized, loading class 4.                          |
| <b>PRODUCT LINE</b>                        | Press-locked  |
| <b>MATERIAL</b>                            | S235JR steel - EN 10025-2:2019  |
| <b>SURFACE FINISH</b>                      | Hot Dip Galvanizing - UNI 1461  |
| <b>STANDARD</b>                            | EN 1090-1:2009 + A1:2011  |
| <b>INTENDED USE OR USES OF THE PRODUCT</b> | Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate. |
| <b>DURABILITY</b>                          | Galvanized surface as per standard EN ISO 1461. Galvanizing durability according to EN ISO 14713.   |
| <b>REACTION TO FIRE</b>                    | Class A1 according to standard EN 13501-1   |
| <b>LOADING CLASS</b>                       | D400 - EN 1433:2008   |

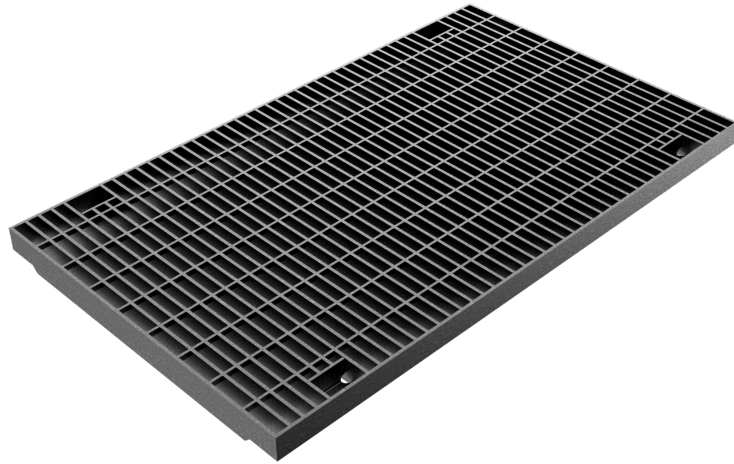

| Article dimensions mm | Weight Kg/each |
|-----------------------|----------------|
| 595 x 1000 x H 50     | 60,97          |