



TECHNICAL SHEET

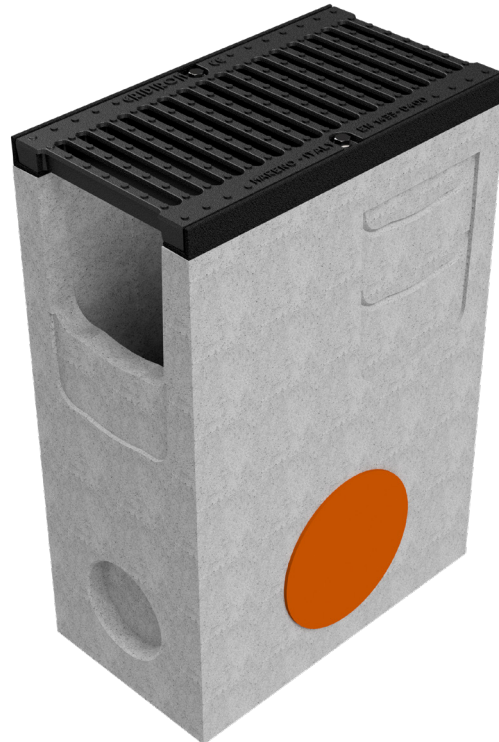

ASSEMBLED CODE	4RG3PZGS
DESCRIPTION	Fiber reinforced concrete sump unit for channel MOD. R265, c/w lateral outlet with sleeve with seal and cap Ø200 mm, n.3 knock-out sections for additional drainage point Ø125 mm and a lateral connector sleeve for "T" intersection, c/w n. 1 x GJS500-7 ductile iron grating dim. 265x500 H30 mm, installed and locked, painted. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Reinforced concrete sump unit
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	16
1) CHANNEL	4RG3PZ
MATERIAL	Constant flow concrete
SERIES TYPE	R series 265
SECTION TYPE	Standard
PROFILE TYPE	ductile iron PROFILES
VERSION TYPE	Normal without built-in slope
2) GRID	4R03GS2
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

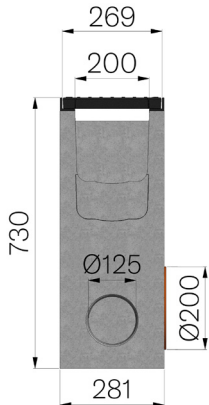

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 281 x H 730	200	376	200	114,7