


# TECHNICAL SHEET



<b>CODE</b>	4RG3PZ
<b>DESCRIPTION</b>	Fiber reinforced concrete Sump unit for channel MOD. R265, c/w lateral outlet with sleeve with seal and cap Ø200 mm, n.3 knock-out section for additional drainage point Ø125 mm and a lateral connector sleeve for "T" intersection.
<b>PRODUCT LINE</b>	Reinforced concrete sump unit
<b>MATERIAL</b>	Constant flow concrete
<b>SERIES TYPE</b>	R series 265
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	ductile iron PROFILES
<b>VERSION TYPE</b>	Normal without built-in slope
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	E600 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)

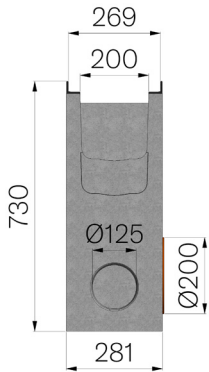

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 281 x H 730	200	376	200	105,8