



TECHNICAL SHEET

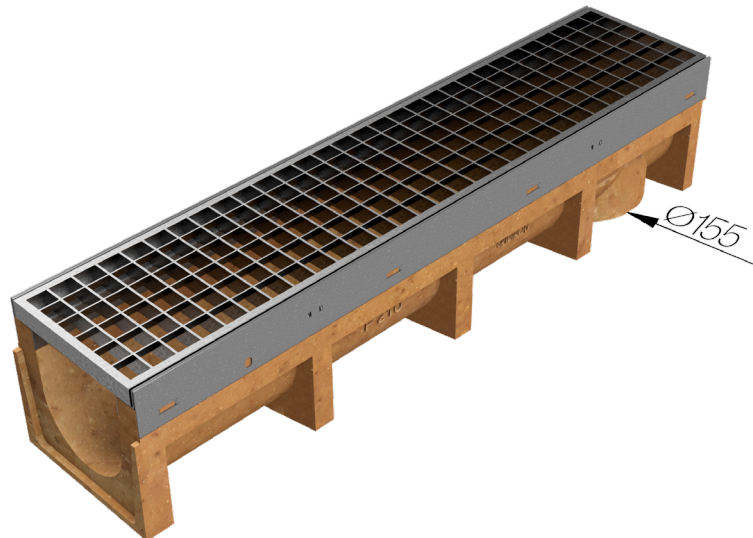

| | |
|--|---|
| ASSEMBLED CODE | 4RP2SGP |
| DESCRIPTION | P210 additivated polymer concrete drain channel, with Gridiron's special galvanized edge rails, c/w pressure locked grating panel, in S235JR UNI EN 10025-2:2019 steel, bearing bar 25x2, transverse bar 10x2, mesh 33x33, dim. 210x1000, assembled and locked, hot-dip galvanized, runoff section cm ² 210. Loading class C250 accordingly to Standards UNI-EN 1433:2008 Norm as for installation instructions. |
| PRODUCT LINE | Drainage channel type "M" |
| STANDARD | EN 1433:2008 |
| LOADING CLASS | C250 - EN 1433:2008 |
| INTENDED USE OR USES OF THE PRODUCT | Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate. |
| DURABILITY | NPD |
| QUANTITY PER PACK | 20 |
| 1) CHANNEL | 4RP2S |
| MATERIAL | Polymer Concrete |
| SERIES TYPE | P series 210 |
| SECTION TYPE | Standard |
| PROFILE TYPE | Galvanized edge |
| VERSION TYPE | Normal without built-in slope |
| 2) GRID | 4R02GP |
| GRID TYPE | Press-locked |
| MATERIAL | Carbon Steel S235JR acc. to EN 10025-2:2019 |
| SURFACE FINISH | Hot Dip Galvanizing - UNI 1461 |

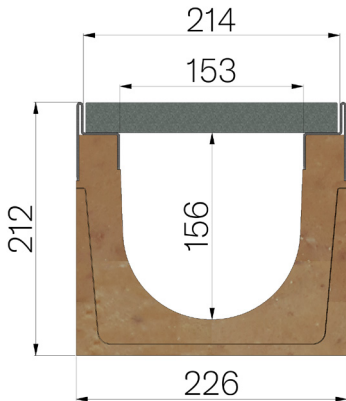

| Article dimensions mm | Inner width mm | Runoff section cmq | Bottom outlet mm | Weight Kg/each |
|-----------------------|----------------|--------------------|------------------|----------------|
| 1000 x 226 x H 212 | 153 | 210 | Ø155 | 31,2 |