


TECHNICAL SHEET



CODE	4RP3GPA
DESCRIPTION	Press-locked grating panel, bearing bar 30x3, transverse bar 10x2, mesh 33x15 (heelguard), suitable for P265 drain channel, with L shaped edge with holes for locking at channel, hot-dip galvanized, loading class C250 accordingly to Standards UNI-EN 1433:2008 Norm as for installation instructions.
PRODUCT LINE	Press-locked
MATERIAL	S235JR steel - EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461
STANDARD	EN 1090-1:2009 + A1:2011
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Galvanized surface as per standard EN ISO 1461. Galvanizing durability according to EN ISO 14713.
REACTION TO FIRE	Class A1 according to standard EN 13501-1
LOADING CLASS	C250 - EN 1433:2008

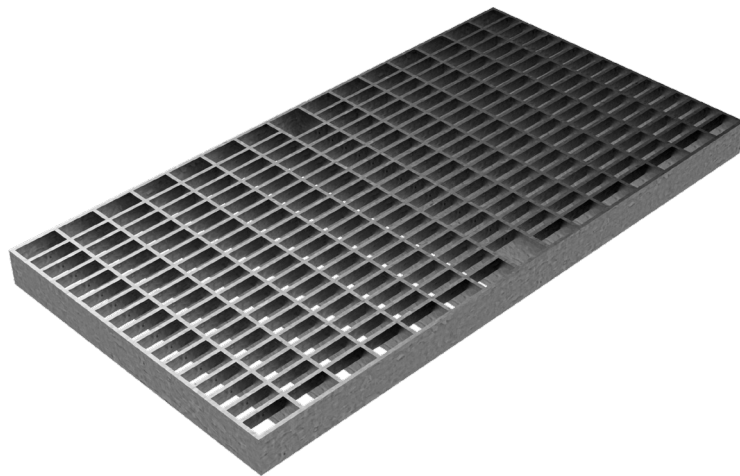

Article dimensions mm	Weight Kg/each
265 x 500 x H 30	6,5