



## TECHNICAL SHEET

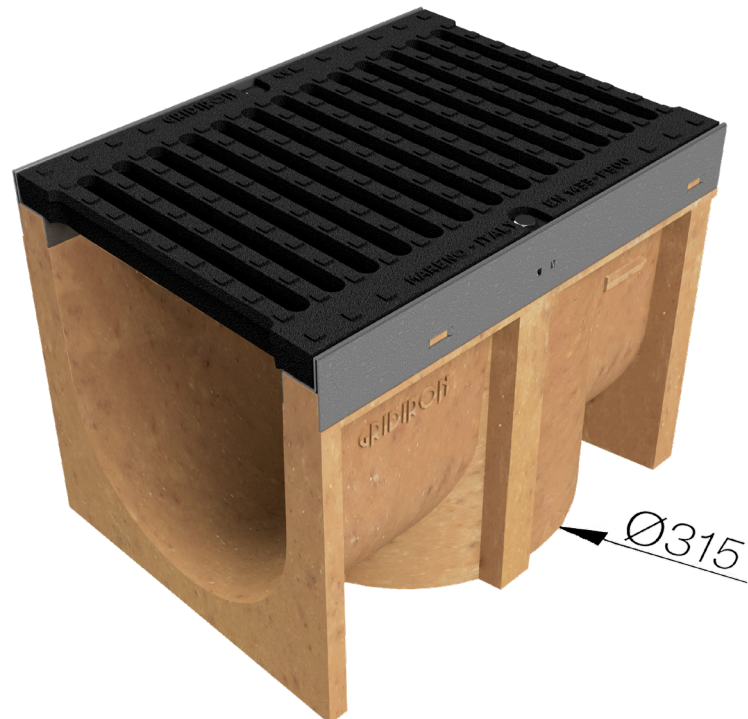

<b>ASSEMBLED CODE</b>	4RP5MSGF
<b>DESCRIPTION</b>	Channel P365 in polymer concrete, with galvanised edge, complete with no.1 cast iron grating GJS500-7 mm.365x500 h30 blocked, average drainage cross-section cm <sup>2</sup> 833 load capacity F900 as per UNI EN 1433:2008 standards if installed following instructions.
<b>PRODUCT LINE</b>	Drainage channel type "M"
<b>STANDARD</b>	EN 1433:2008
<b>LOADING CLASS</b>	F900 - EN 1433:2008
<b>INTENDED USE OR USES OF THE PRODUCT</b>	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
<b>DURABILITY</b>	NPD
<b>QUANTITY PER PACK</b>	9
<b>1) CHANNEL</b>	4RP5S
<b>MATERIAL</b>	Polymer Concrete
<b>SERIES TYPE</b>	P series 365
<b>SECTION TYPE</b>	Standard
<b>PROFILE TYPE</b>	Galvanized edge
<b>VERSION TYPE</b>	Normal without built-in slope
<b>WATER FLOW LT / SEC</b>	0,5%=126 -1%=179,4 -1,5%=219,7 -2%=253,6 -3%=310,7
<b>2) GRID</b>	4R05GSF
<b>GRID TYPE</b>	Ductile-iron Grid
<b>MATERIAL</b>	Ductile-Iron GJS500-7 : EN1563
<b>SURFACE FINISH</b>	Paint coating

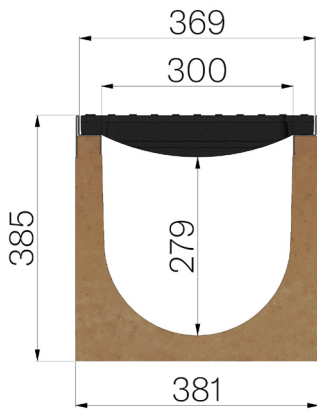

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 381 x H 385	300	833	Ø315	56,63