


TECHNICAL SHEET



ASSEMBLED CODE	4D12SGS
DESCRIPTION	ABS channel MOD. PLASTIC FLY 150, with galvanised protective edge rails, c/w 2 x GJS500-7 ductile iron gratings, installed and locked, painted. Channel average runoff section cm ² 216. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	35
1) CHANNEL	4D12S
MATERIAL	ABS
SERIES TYPE	Plasticfly series 150
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4D12GS1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

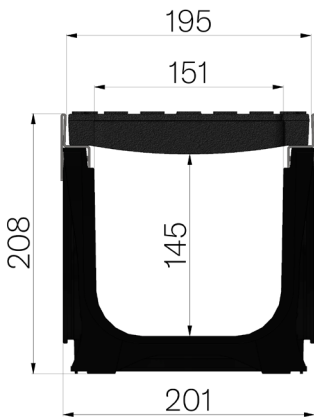

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 201 x H 208	151	216	21,16