



TECHNICAL SHEET

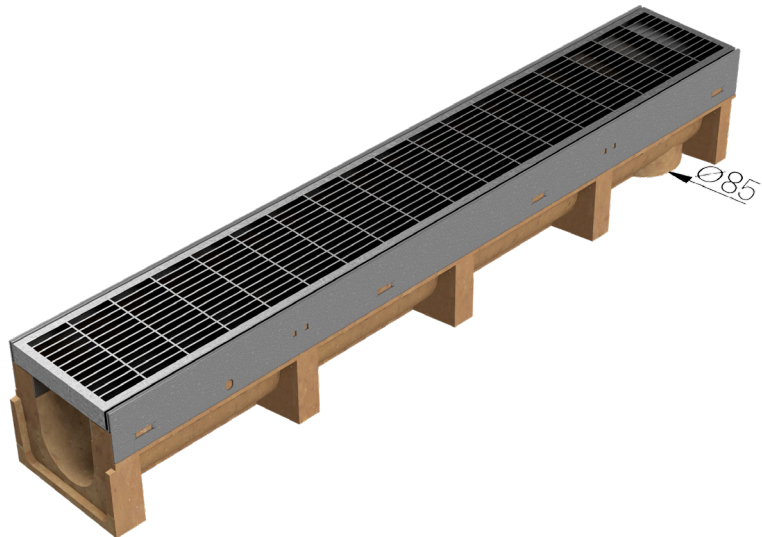

ASSEMBLED CODE	4RP1SGPA
DESCRIPTION	P150 polymer concrete drain channel, with Gridiron's special galvanized edge rails, c/w pressure locked grating, bearing bar 25x2, transverse bar 10x2, mesh 33x11 (heelguard), assembled and locked, hot-dip galvanized, dim. 150x1000 H25, runoff section sqcm. 95. Loading class C250 accordingly to Standards UNI-EN 1433:2008 Norm as for installation instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	C250 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	36
1) CHANNEL	4RP1S
MATERIAL	Polymer Concrete
SERIES TYPE	P series 150
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4R01GPA
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

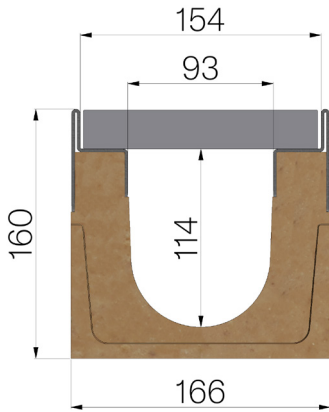

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 166 x H 160	93	95	24,4