


# TECHNICAL SHEET



|  |   |
|--|---|
| <b>CODE</b>                                | 4520L   |
| <b>DESCRIPTION</b>                         | Galvanized steel brickslot cover mod. THIN H60, th. 20/10, with 15 mm side slot, height 60+20 mm, for channel MOD. BASE 200.              |
| <b>PRODUCT LINE</b>                        | Galvanized THIN covers  |
| <b>MATERIAL</b>                            | Metal sheet DX51D - EN 10346/EN 10143   |
| <b>SURFACE FINISH</b>                      | Galvanized Z200 - EN 10346  |
| <b>STANDARD</b>                            | EN 1433:2008  |
| <b>INTENDED USE OR USES OF THE PRODUCT</b> | Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate. |
| <b>DURABILITY</b>                          | Galvanized surface as per standard EN ISO 1461. Galvanizing durability according to EN ISO 14713.   |
| <b>LOADING CLASS</b>                       | C250 - EN 1433:2008   |

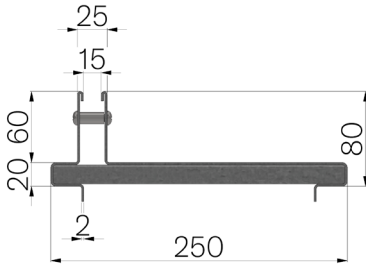

| Article dimensions mm | Slot size mm | Thickness mm | Weight Kg/each |
|-----------------------|--------------|--------------|----------------|
| 250 x 1000 x H 60     | 15           | 2            | 8,4            |