


TECHNICAL SHEET



ASSEMBLED CODE	45L5SLA
DESCRIPTION	Polymer concrete channel MOD. BASE 100 LOW, c/w galvanised steel inlay press-formed metal sheet grating, 8 mm slots, Th. 10/10, installed, self-locking. Channel average runoff section cm ² 46. Load class A15 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	A15 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
QUANTITY PER PACK	64
1) CHANNEL	45L5S
MATERIAL	Polymer Concrete
SERIES TYPE	Base series 100
SECTION TYPE	Low
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
2) GRID	4505GLA
MATERIAL	Metal sheet DX51D - EN 10346/EN 10143
SURFACE FINISH	Galvanized Z200 - EN 10346

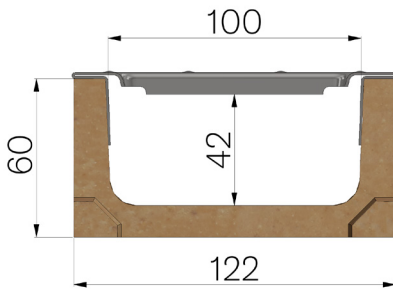

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
1000 x 122 x H 60	100	46	Ø80	6,5