



TECHNICAL SHEET

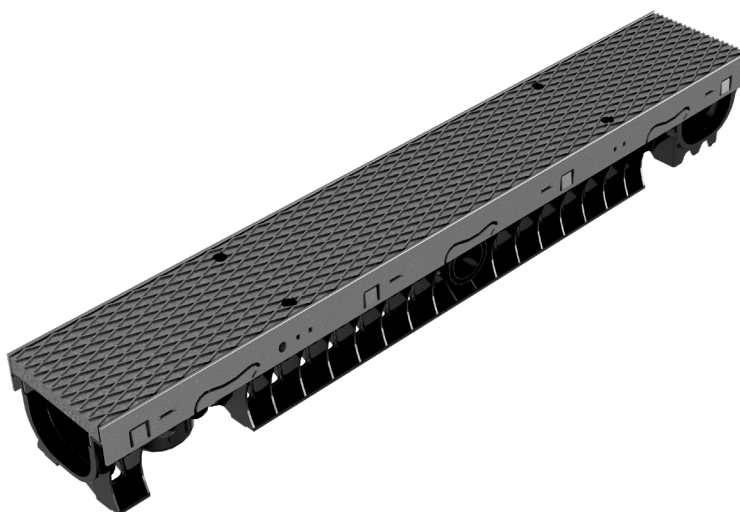

ASSEMBLED CODE	4D0CSP
DESCRIPTION	ABS channel MOD. PLASTIC FLY 100 LOW, with galvanised protective edge rails, c/w embossed metal sheet plate Th. 30/10, reinforced, installed and locked, hot-dip galvanised. Channel average runoff section sqcm. 69. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Grades of weathering resistance: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	78
1) CHANNEL	4D0CS
MATERIAL	ABS
SERIES TYPE	Plasticfly series 100
SECTION TYPE	Low
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
WATER FLOW LT / SEC	0,5%=4,9 - 1%=6,9 - 1,5%=8,4 - 2%=9,7 - 3%=11,9
2) METAL SHEET PLATE	4D02P
TYPE OF METAL PLATE	Metal sheet plates for channels
MATERIAL	S235JR steel - EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461
UPPER SHEET METAL	Embossed metal sheet plate 30/10

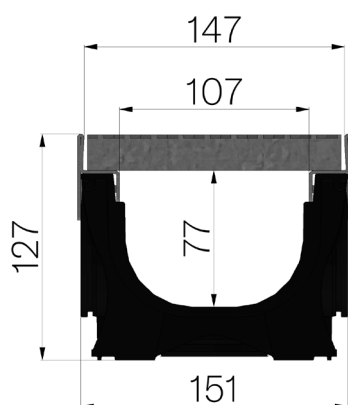

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 151 x H 126 mm	100	69	14,67