


TECHNICAL SHEET



ASSEMBLED CODE	4G22PZGS
DESCRIPTION	Polymeric sump unit, for channel MOD. POLY FLY 200, th. 20/10, galvanized edges, with lateral outlet Ø200 mm, L.500 mm, c/w GJS500-7 ductile iron grating, painted, installed and locked. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
1) CHANNEL	4G22PP
MATERIAL	Polymer Concrete
SERIES TYPE	Polyfly series 200
SECTION TYPE	H1
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4D22GS1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Paint coating

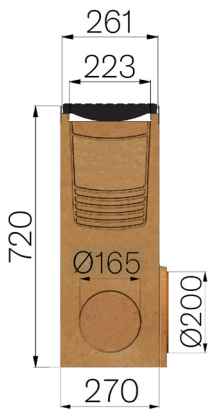

Article dimensions mm	Inner width mm	Runoff section cmq	Bottom outlet mm	Weight Kg/each
500 x 270 x H 720	223	448	Ø200	70,23